


FERRO®

NEW

C.H & U.W.W. SAFETY GROUP SET



- **PRECISE AND ROBUST WORKMANSHIP**
- **HIGH-QUALITY MATERIALS**

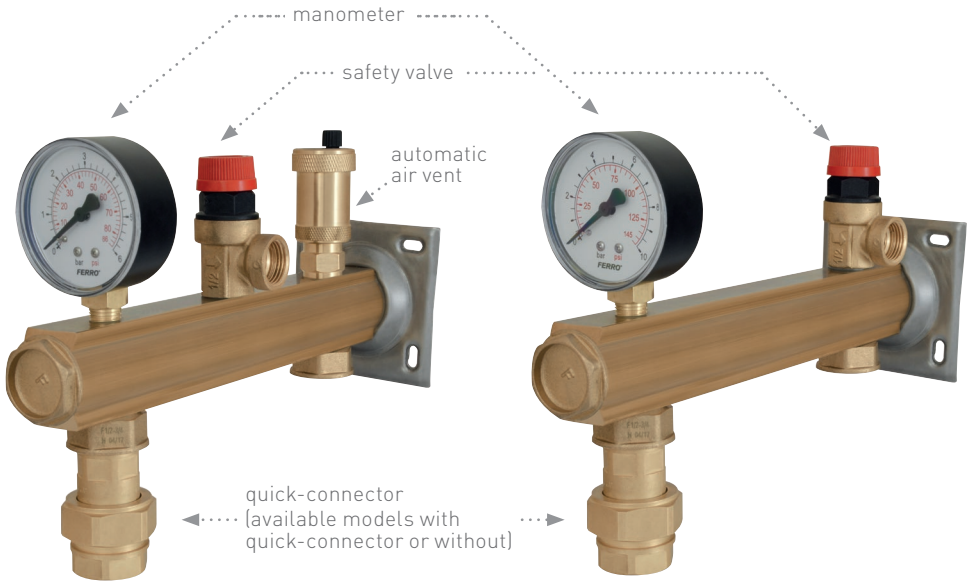

GBM


GBMW

NEW

C.H & U.W.W. SAFETY GROUP SET

GBM SAFETY GROUP SET FOR C.H.


- operating temperature: max. 95°C
- operating pressure: max. 6 bar
- max. short-term water temperature: 110°C
- for expansion vessels not larger than 35 litres and 320 mm in diameter
- CW617N brass bar
- stainless steel mounting plate
- accessories:
 - safety valve
 - manometer
 - automatic air vent with shut-off valve
 - available with quick-connector for expansion vessels or without

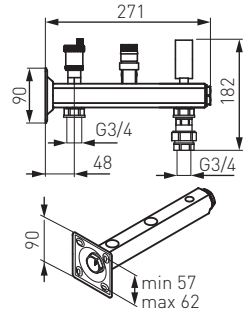

	safety valve	manometer	code
1,5 bar safety group set for C.H.	1,5 bar	0-4 bar	GBM15
1,5 bar safety group set with quick-connector for C.H.	1,5 bar	0-4 bar	GBM15SN01
2,5 bar safety group set for C.H.	2,5 bar	0-4 bar	GBM25
2,5 bar safety group set with quick-connector for C.H.	2,5 bar	0-4 bar	GBM25SN01
3 bar safety group set for C.H.	3 bar	0-6 bar	GBM30
3 bar safety group set with quick-connector for C.H.	3 bar	0-6 bar	GBM30SN01

GBM SAFETY GROUP SET FOR U.W.W.

- operating temperature: max. 95°C
- operating pressure: max. 6 bar
- max. short-term water temperature: 110°C
- for expansion vessels not larger than 35 litres and 320 mm in diameter
- CW617N brass bar
- stainless steel mounting plate
- accessories:
 - safety valve
 - manometer
 - available with quick-connector for expansion vessels or without

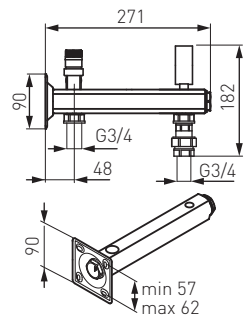

	safety valve	manometer	code
6 bar safety group set for U.W.W.	6 bar	0-10 bar	GBMW60
6 bar safety group set with quick-connector for U.W.W.	6 bar	0-10 bar	GBMW60SN01